
MEARI

Smart Baby Wi-Fi Camera


C1

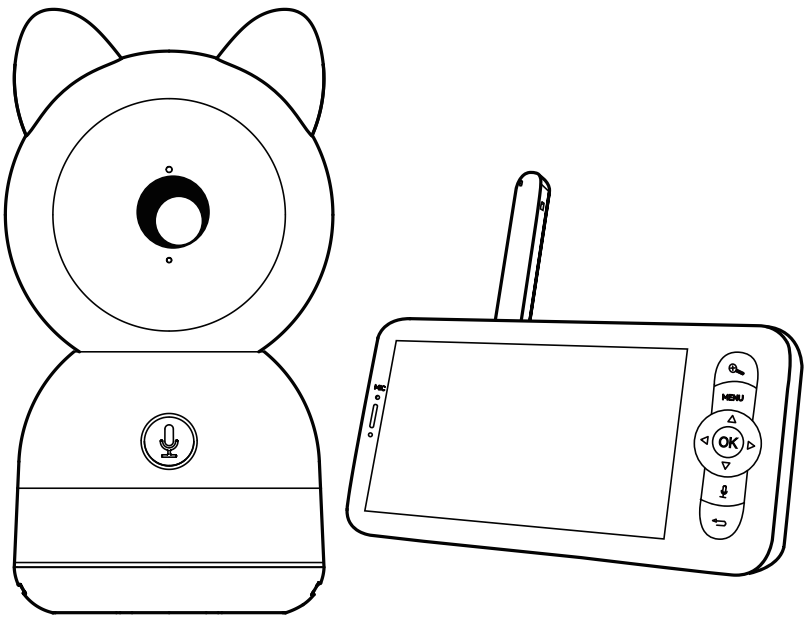


Quick Start Guide

What's in the Box


Please consult this checklist for all parts.



Camera X1




Headgear X1



Monitor X1




Power adapter X2




Power cable X2



Screw package X1




Bracket X1



Quick start guide X1




RESET pin X1





Drilling template X1

Description

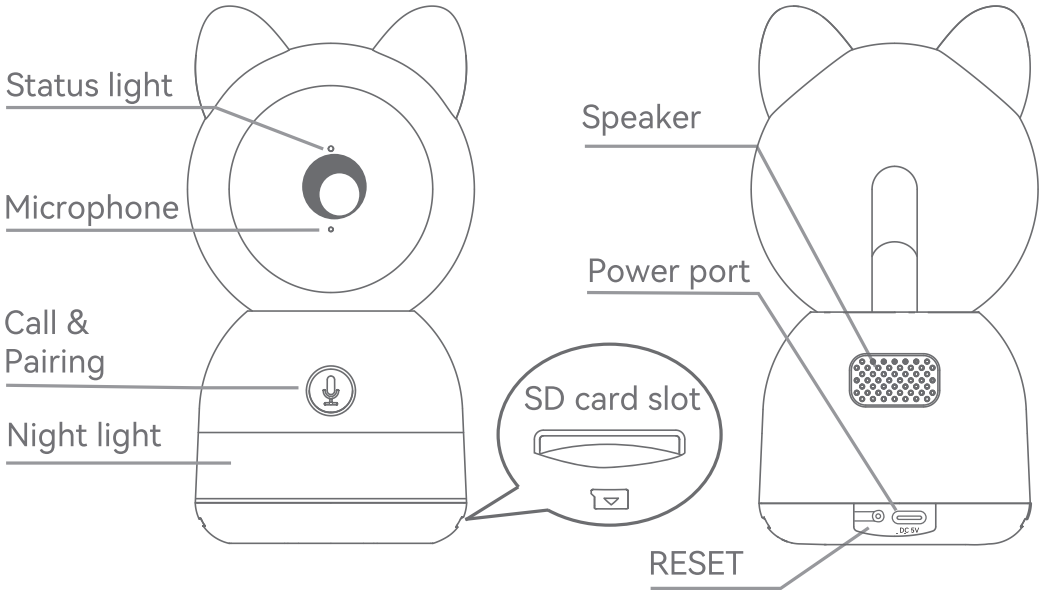

Name	Description
Power supply	DC 5V/1A
Night light	Turn on night light to enjoy a clearer nighttime viewing
Call/Pairing	Press to make a call; long press to pair
Status light	Blinking red slowly: Waiting for network configuration Blinking red fast: Connecting to the network Solid blue: Functioning properly Solid red: Network malfunction
SD card slot	SD card storage (up to 256GB)
RESET	Press and hold for 5 seconds to reset the device (all settings will be restored to factory defaults)

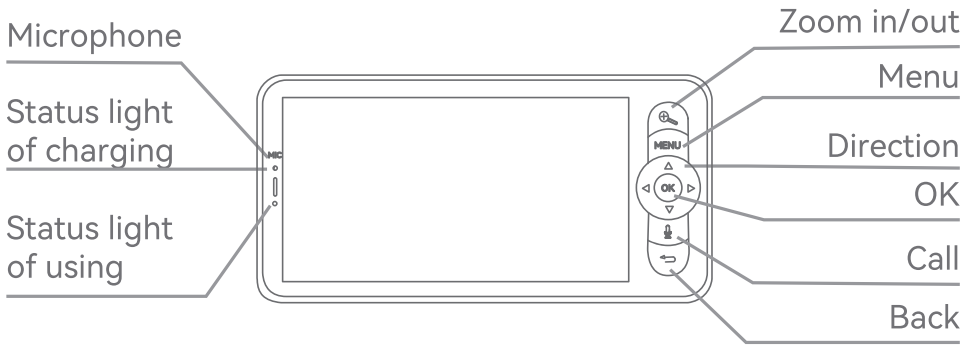

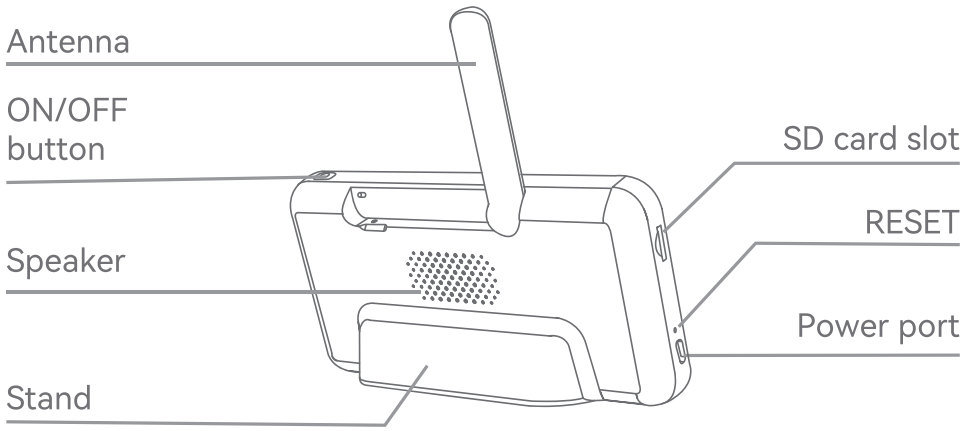

Name	Description
Power supply	DC 5V/1A
Status light of using	Yellow light: Monitor on No light: Monitor off
Status light of charging	Orange light: Charging Green light: Fully charged
Antenna	Adjust the angle to get better signals
ON/OFF button	Long press 5 seconds to turn on/turn off the monitor
Zoom in/out	Adjust the image magnification in 1X, 2X or 4X
Menu	Access the settings and options
Direction	Navigate and select options
OK	Confirm selections or wake the screen

Name	Description
SD card slot	SD card storage (up to 128GB)
RESET	Press with pin to reset the monitor
Call	Make a call after pressing the button
Back	Press to back up; Long press to stop playing music

Get the App

1 Download App

- **If you are new to Meari**

  Meari is available for both iOS and Android. Search for "Meari" in App Store or Google Play, or scan the QR Code to download the App.

  You can select the App according to needs.



Download App (iOS & Android)

- **If you have already an account**

  Skip this section.

Note: Support



iOS



Android

2 Set up router

The device only supports 2.4GHz Wi-Fi.

Ensure you have the SSID and password.



Please keep network available

2.4GHz	5GHz
✓	✗

Note: The length of the Wi-Fi SSID and password should not exceed 24 characters.

If your device has trouble connecting to the Wi-Fi network, or if you wish to switch networks, press and hold the RESET button for 5 seconds to reset the device.


Registration

Note: The App interface may vary due to version updates. Please check the App Store for the latest updates.

1 Sign up


Open the App, and tap **Sign up** to register.


If you already have an account, tap **Log In** to access it.

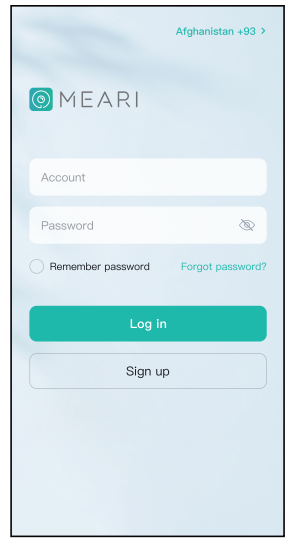

2 Complete registration

Enter a valid email address, agree to the privacy agreement, then set your nickname and password.

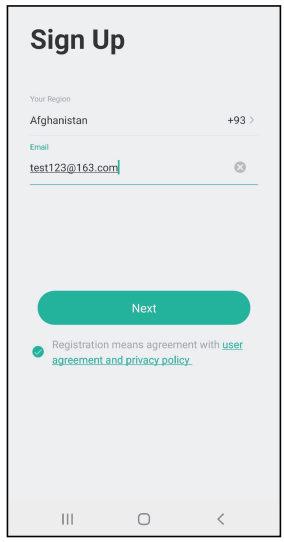

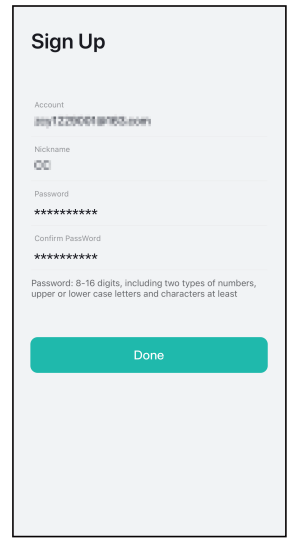

Note: Before creating a new account, please read the Privacy Policy and Terms of Use carefully.


Add Device

1 Pair device to the App


Pairing method 1

a. Enable Bluetooth on your phone.

b. In the App, tap **Add Device** or **+**. The device will be searched for via Bluetooth and appear on the screen. Follow the on-screen instructions to complete pairing.

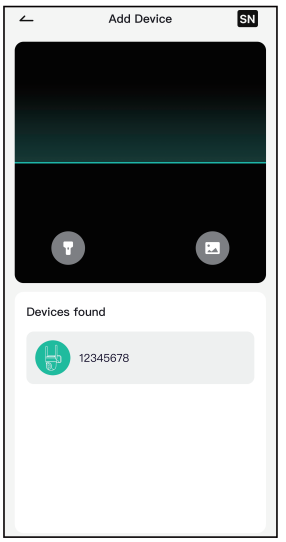


Note: If the device is not in the red slow flashing after 30 seconds of turing on, press and hold the reset button for 5 seconds to reset, and then restart to pair the camera with the App.

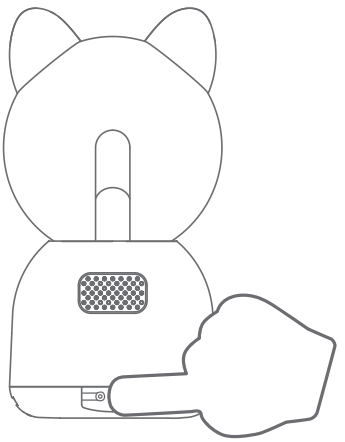


c. Complete the network configuration.


Pairing method 2


a. In the App, tap **Add Device** or **+**. Scan the QR code located on the device casing.

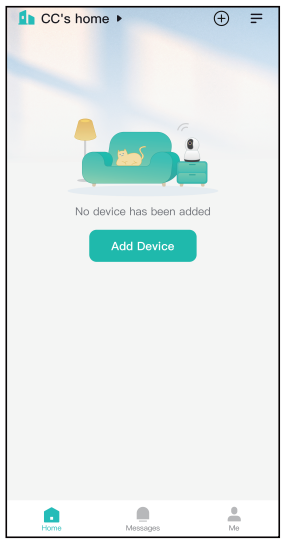


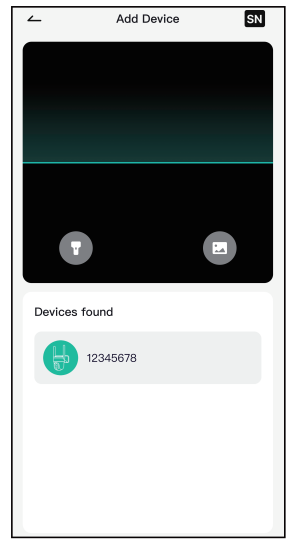

b. Reset the device and ensure a stable Wi-Fi connection.

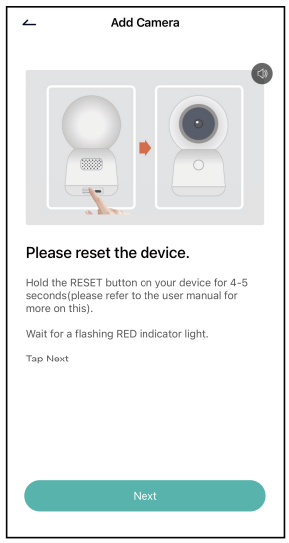

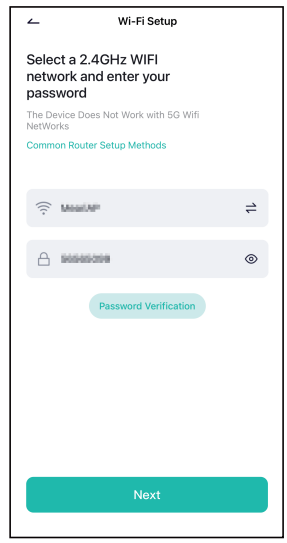


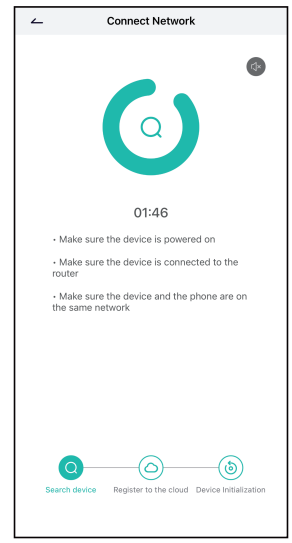



c. Complete the network configuration.

Pairing method 3


a. In the App, tap **Add Device** or **+**. Select the icon according to actual camera.

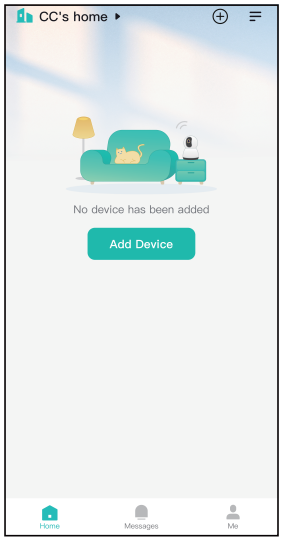


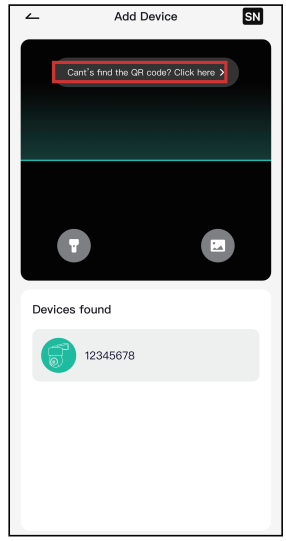

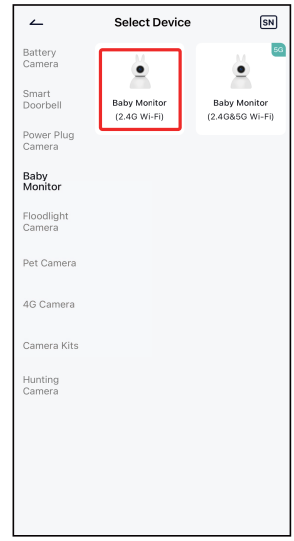


b. Reset the device and ensure a stable Wi-Fi connection.

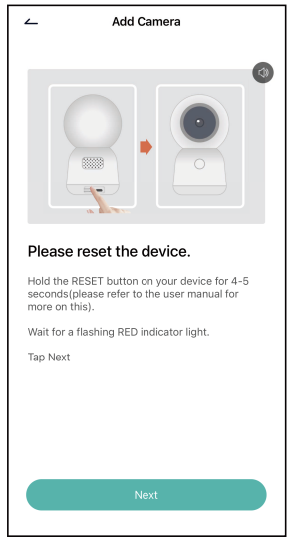

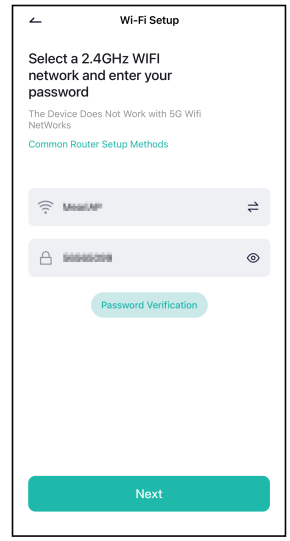

c. Use the device to scan the QR code displayed in the App on your phone. Place your router, phone, and device close together for best connectivity.

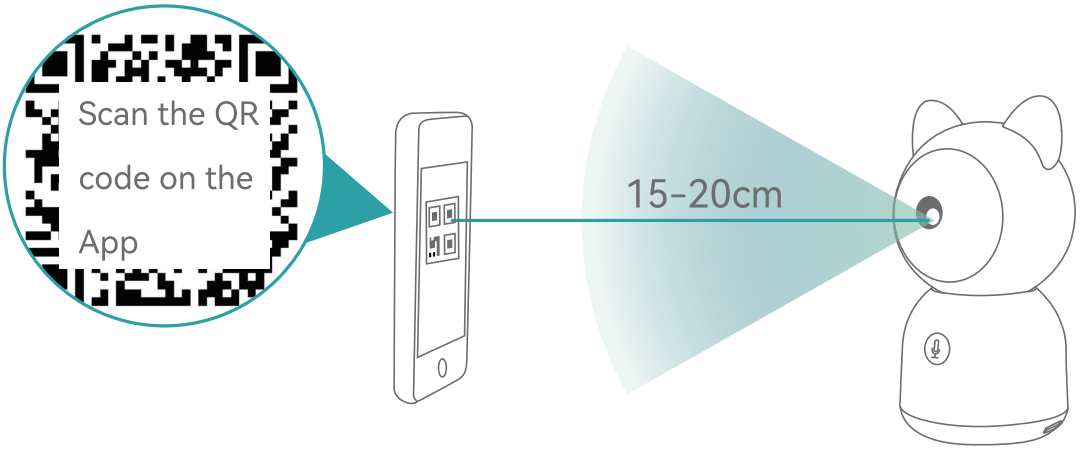


d. Complete the network configuration.

Installation

- **Method 1**

  Simply place the device on a horizontal surface where Wi-Fi singal is strong.

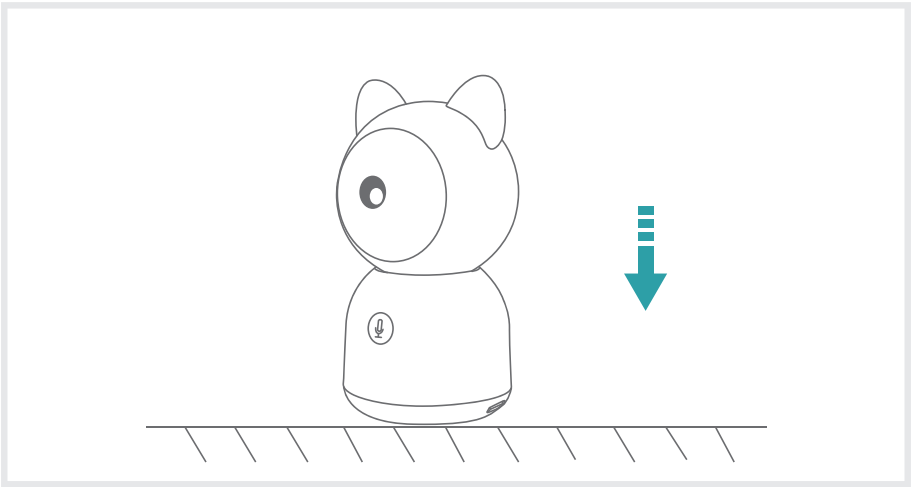

- **Method 2**


  Install the device to ceiling.

  a. Pick a clean and flat surface.


  Note: Make sure the wall is strong enough to withstand 3 times the weight of the device.

  Do not stick the adhesive tape on the limewashed walls.


b. Apply the drilling template to the selected wall and make holes with a drill (Φ6mm).

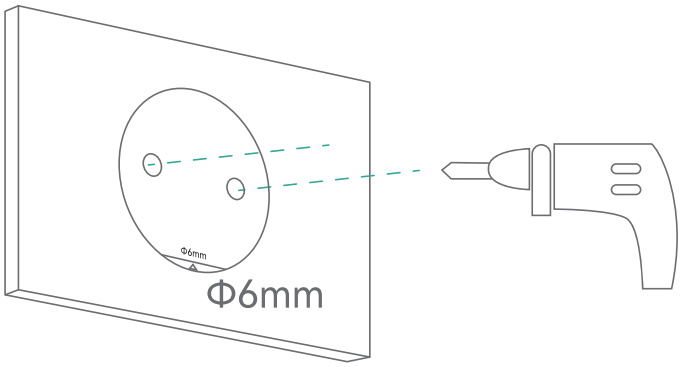

c. Fix the included mounting bracket to the clean surface.

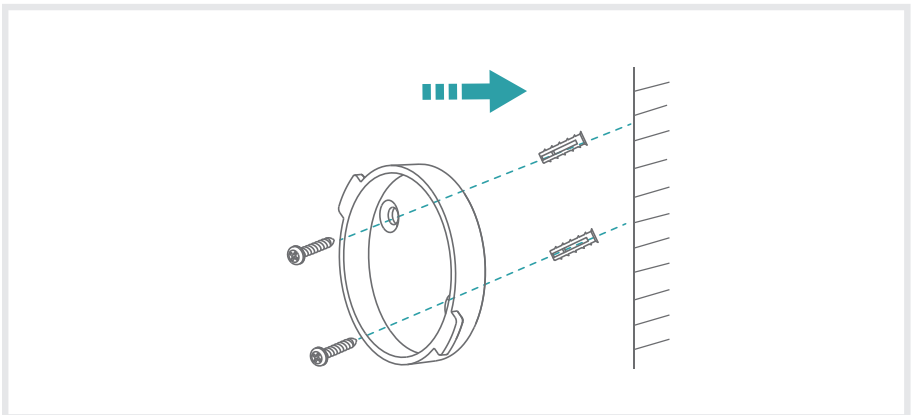


d. Insert the camera to the bracket.

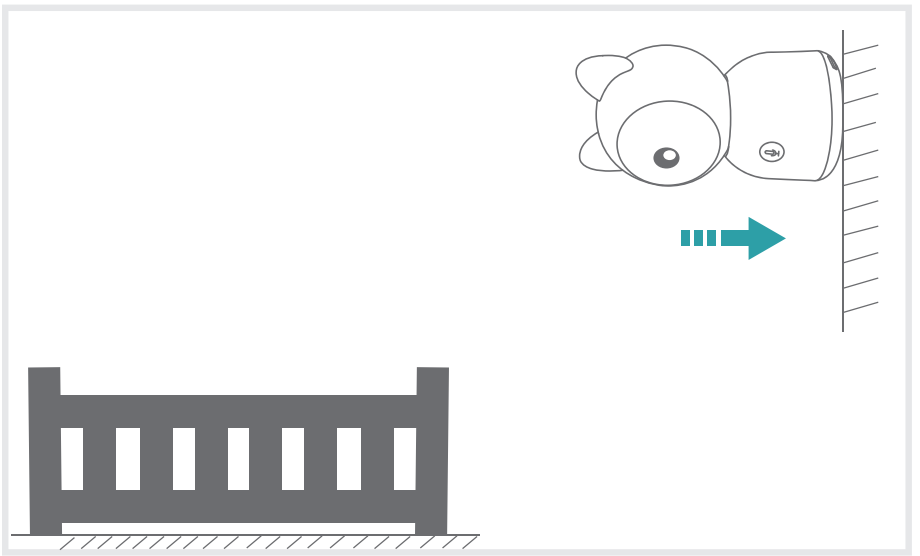

Live View

Note: The App interface may vary due to version updates. Please check the App Store for the latest updates.

Open the App to watch live videos, take photos, talk through audio, record videos, and use other functions as needed.

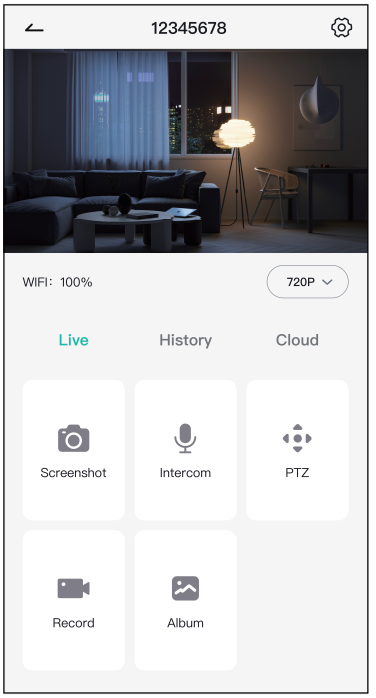

Monitor Using Tips

1 Pairing of camera and monitor

Power on the camera and the monitor, and they will automatically connect. If the connection fails, please follow the steps below to pair. The pairing is distance limited, so please make sure that the distance between the camera and the monitor is no more than 200m.

• Bind the monitor and camera

1. Press the Menu button on the monitor, and select > Camera.

Select Camera 1 or Camera 2/3/4 which you need to pair.

2. Long press the camera pairing button until you hear the prompt tone.

3. Press the OK button on the monitor to start pairing.


4. If you need pair 2 cameras, please repeat step 2~ step 4.


• Unbind the monitor and camera

1. Press the Menu button on the monitor, and select > Camera.

2. Select Camera 1 or Camera 2/3/4 which you need to unbind.

3. Long press the OK button to release the binding.

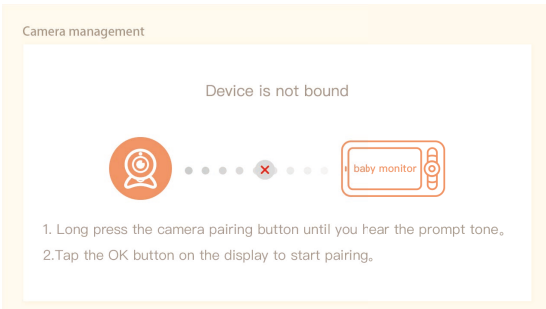

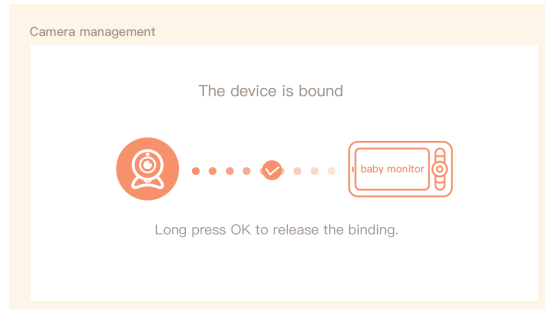


2 Camera switching method

If you have added 2 or more than 2 cameras, the monitor will display 2 live views at the same time. If you want to set parameters or enable functions of one of the cameras, you need to select and switch to the camera first (the number shown in the ① represents the selected camera).

- **Camera switching method 1: manual switching**

On the home page, press 🔍 button and use the Direction button to switch the camera between Cam1, 2, 3 or 4 if you have added multiple cameras. Select one camera you need and press the OK button on the monitor to enter full-screen viewing mode. And then you can press 🔍 button again to zoom in and zoom out. (Zooming function does not work when the screen is not in full screen.)


Note: When you add 3 (or 4) cameras,press 🔍 button to enter the selection mode. Camera 1, 2 are selected by default, press 🔍 button again to switch to camera 2, 3(or 3, 4)

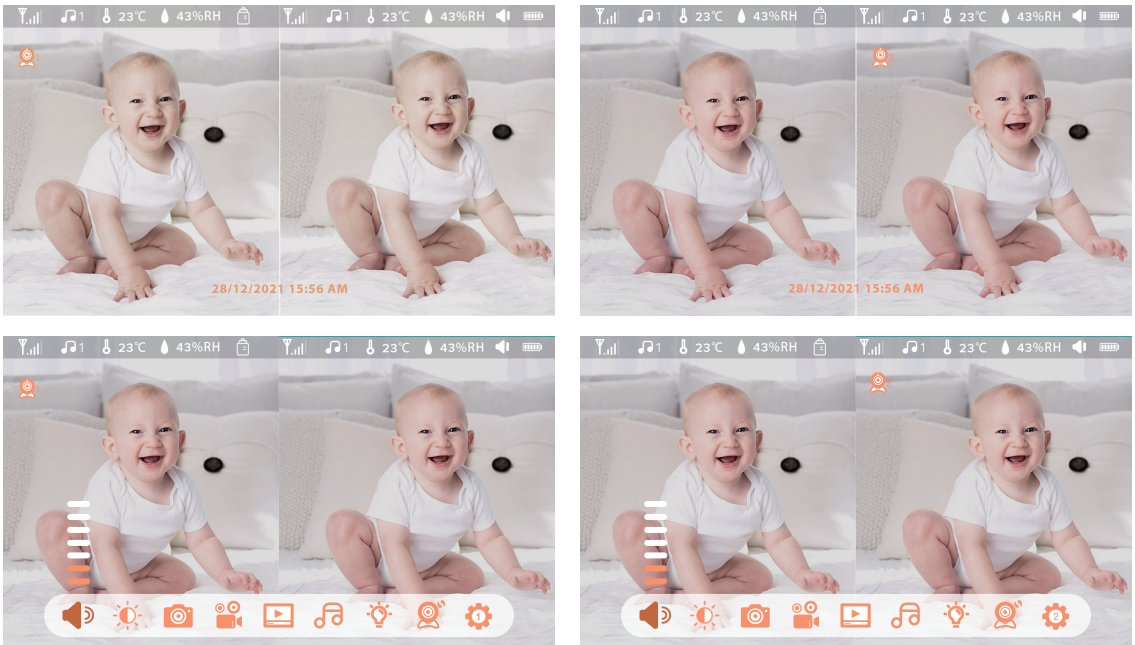

- **Camera switching method 2: timed cycle switching**

We also offer the option of switching each camera in a timed cycle, making it easy for you to set up monitoring rounds as needed.

1. Press Menu on the monitor and select > On .
2. Press UP direction button to the mode of timed cycle selection.
3. Press LEFT and RIGHT direction buttons to select option of different timed cycle.

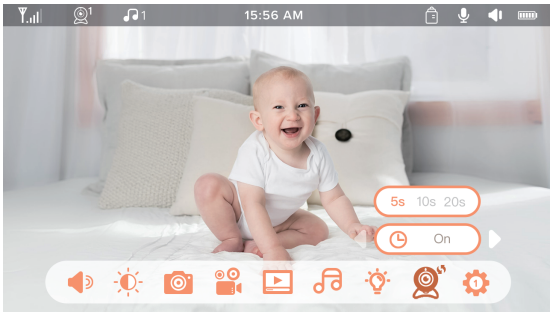

3 Rotate the camera

You can adjust the monitoring angle for better vision.

The direction buttons on the monitor screen are available when the camera is powered on. Press the direction buttons to rotate the camera horizontally and vertically for better vision.

4 Photo & video

• Take a photo

You can take a photo when you want to capture an interesting scene of the baby. Press Menu button on the monitor, select and press OK to take a photo.

• Record a video

You can record a video when you want to capture a meaningful time for the baby. Press Menu on the monitor, select and press OK to record a video.


• View the taken photos and recorded videos

1. Press the Menu button on the monitor, select and press OK to enter the interface.

2. Select the camera and date, select the photo or video you want to view and press OK to enter preview mode.

* Press OK to play or pause the vedio in the preview mode.


* Press the Return button to the quit preview or return to the main menu.

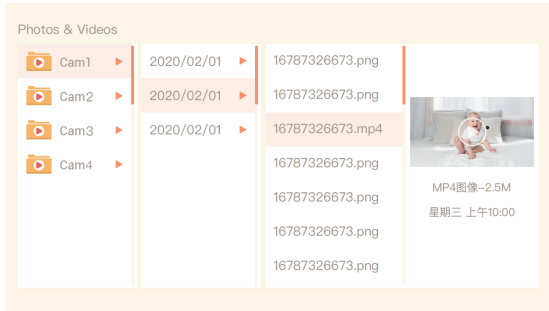

5 Play music

You can play music when your baby needs to be soothed. There are various soft music to select.

Press the Menu button on the monitor screen, select and press OK to enter the music interface. You can select different music, change the music cycle mode, or adjust the music volume.

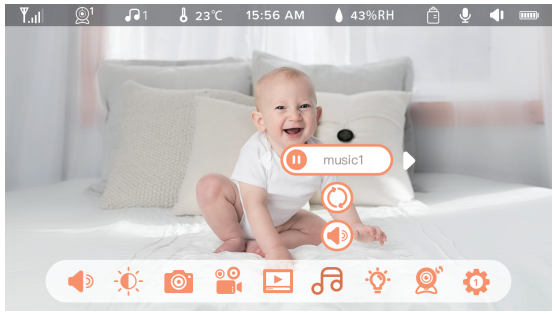

6 Feeding reminder

Remind you to feed your baby when you are too busy, or when you want to give your baby a regular diet.

1. Press the Menu button on the monitor, and select ⚙ > Feeding Reminder.

2. Select on or off to open or close feeding reminders. You can set up to 10 feeding times one day. And when the set time is up, a feeding alarm will appear on the monitor screen.

3. Press UP and DOWN direction buttons to select between 10 time options, and press OK to start the time setting.




7 Smart care


1. Press Menu on the monitor and select ⚙ > Smart Care.

2. Press UP and DOWN direction buttons to select options between motion detection, noise detection, and alarm volume, then press OK to save.

3. When set up one detection mode, please press LEFT and RIGHT direction buttons to change options, and press UP and DOWN direction buttons to adjust the sensitivity.

* You can select different sensitivity according to your needs. Low refers to low sensitivity, and high refers to high sensitivity.

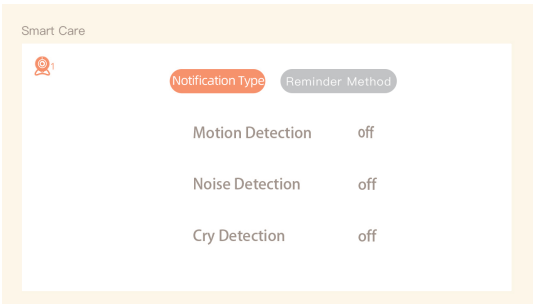

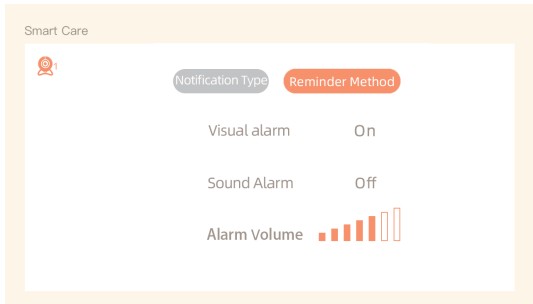

8 Temperature and humidity detection


You can monitor the temperature and humidity of your baby's room in real-time. When the temperature and humidity are out of range, you will recieve the alarms immediately, so that you can take measures.

1. Press the Menu button on the monitor, and select > Temperature and humidity.

2. Press UP and DOWN direction buttons to select options between temperature range, humidity range and out-of-range reminder, then press OK to set up.

3. Press LEFT and RIGHT buttons to change options, then press UP and DOWN buttons to change values and units.

In the Out of range reminder option, select to turn on or off the alarm when the temperature and humidity are out of range.

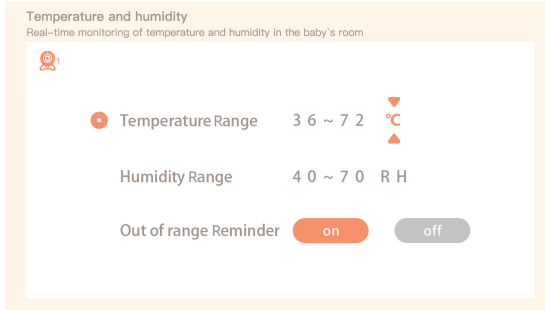


9 Safety protection

- **Wi-Fi network channel**

If you turn off the Wi-Fi network channel, the App will not be able to view the camera.

- **Visited records**


You can also view the visited records as all visits through the App will be recorded.

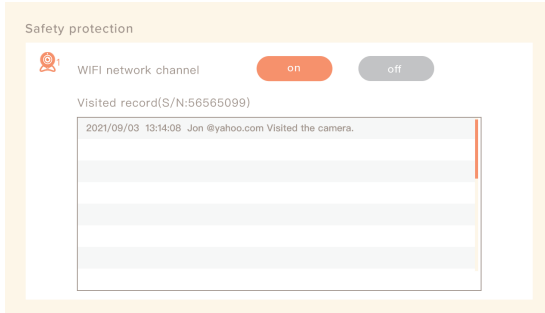

10 Night light

You can turn on the night light if needed, and you can set lighting mode and light color.

Press the Menu button, and select > Light > Night light.

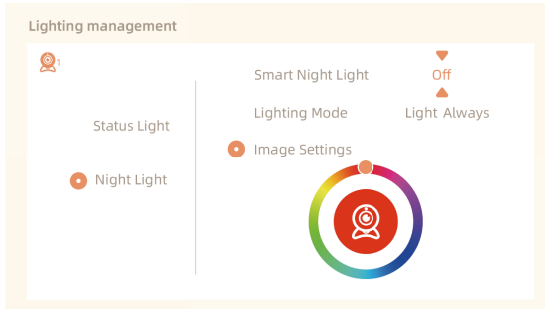

11 General settings

• Set up brightness

1. Press Menu on the monitor, select and press OK to enter.

2. Press UP and DOWN buttons to adjust brightness.

• Set up time:

1. Press Menu on the monitor and select > Date and time.

2. Press the direction buttons to change the date, time, and time displaying mode.

• Set up language:

1. Press Menu on the monitor and select > Language.

2. Select the language you need.

• Set up sleep mode:

You can set up sleep mode to increase standby time.

1. Press Menu on the monitor and select > Sleep mode.

2. In default mode(Audio off), the audio from the camera can not be heard after the display is off, so the standby time is long. In Audio on mode, the audio from camera can still be heard even after the screen is turned off, and you can choose the time(1,5,10,30 or 60min), but the standby time is shorter. In Always on mode, the monitor remains on unless the power button is pressed, with short standby time.

• Turn on and off status indicator:

If you turn on the status indicator, you can get the working status of the camera. You can also turn off the status indicator if you think it will affect your baby's sleep.

Press Menu on the monitor and select -> Open (Or Press the Menu button, select >Light > Status light.).

- **SD card:**

1. Press Menu on the monitor and select >SD card management. Then you can view the total capacity and remaining capacity of your SD card.

2. (Optional) You can format the SD card as you needed, but make sure that the important data is backed up.

- **Upgrade:**

You can upgrade your camera when the upgrade alarm appears. Or press Menu on the monitor and select > Device information to check whether there is an upgrade.

- **Low battery alarm:**

When the camera is low on battery, the low battery alarm will appear on the monitor screen. Please charge the monitor as soon as possible.

FAQs

Camera

Q: How to disable the LED indicator/blue light in my camera?

A: Meari App >> Device (turn to live video page) >> Settings >> Basic Function >> Network Indicator: Disable it.

Q: How to turn off the camera real-time monitor, and stop recording?

A: Meari App >> Device (turn to live video page) >> Settings >> Basic Function >> Privacy Protection >> Lens OFF.

Q: How to change the Wi-Fi or update the Wi-Fi password for the device?

A: Please delete the camera on App, tap **Add** and follow the steps to use the new Wi-Fi network to add the camera again.

Q: How to share Meari devices with friends and family?

A: Meari App >> Device (turn to live video page) >> Settings >> Device Share >> Add, follow the tips to share your device.

Q: Failed to access the live video, prompts offline?

A: • Please ensure the camera is in the power-on status: the camera network indicator should be on.

• Check the Wi-Fi network is in good condition or restart the router.

• Try to move the camera closer to the router.

• Delete the camera from Arenti App and add it again. Confirm the App and camera firmware are the latest versions.

Q: Cannot find the pairing button?

A: The pairing button is the call button of the camera. Long press the button for 3 seconds, and follow the step instructions of the monitor.

Monitor

Q: What should I do if the monitor is stuck?

A: Press the reset button located near the power port on the monitor, or long press the power button to turn on the monitor again.

Q: How can I change the wallpaper of monitor screen?

A: Press Menu on the monitor and select  > Wallpaper.

Q: How can I upgrade the version of the monitor?

A: Firstly, add the camera to the App. Then press Menu on the monitor and select  > Device Information, then check for available upgrades.

Q: The monitor cannot be previewed properly?

A: Check whether the monitor has connected to the camera. If not, pair the camera and the monitor firstly.

Q: Why the camera or the monitor cannot identify the SD card?

A: Confirm whether the SD card is normally available and the format is FAT32.

Tech Specs

Model: C1-camera	
Resolution	2304(H) x 1296(V)
Angle of view	100°
Pan/Tilt	Pan: 0°~345°, tilt: -15°~-40°
IR Distance	Up to 10 m (33 ft)
Working temp	0°C to 40°C
Local storage	SD card (up to 256GB)
Input power	DC 5V / 1A
Consumption	Up to 4.5W
Supported phone OS	iOS 9 / Android 5.0 or later
2.4GHz Wi-Fi	2412-2472MHz (Max. power<20dBm) (For CE) 2412-2462MHz (Max. power<30dBm) (For FCC)
SRD	866MHz (Max. power<20dBm) (For CE) 905-925MHz (Max. power<30dBm) (For FCC)
Bluetooth	2400-2483.5MHz (Max. power<20dBm)

Model: C1-monitor	
Resolution	1280(H) x 720(V)
Battery capacity	3350mAh
Working temp	0°C to 40°C
Local storage	SD card (up to 128GB)
Input power	DC 5V / 1A
SRD	866MHz (Max. power<20dBm) (For CE) 905-925MHz (Max. power<30dBm) (For FCC)
Bluetooth	2400-2483.5MHz (Max. power<20dBm)

Certifications



Don’t throw batteries or out of order products with the household waste (garbage). The dangerous substances that they are likely to include may harm health or the environment. Make your retailer take back these products or use the selective collect of garbage proposed by your city.

CE

Hereby, we declare that the radio equipment type ‘C1’ is in compliance with the Directive 2014/53/EU.

The full test of the EU declaration of conformity is available at the following Internet address: http://www.meari.com

Specific precautions for EMC

This is a Class B product, in a domestic environment, this product may cause radio interference, in which case the user may be required to take adequate measures.

RF EXPOSURE INFORMATION

This device meets the EU requirements (2014/53/EU) on the limitation of exposure of the general public to electromagnetic fields by way of health protection.

Power Adapter Safety

1. The power plug is intended to serve as a disconnect device. Do not drop or cause an impact to the power adapter.
2. If the power cable is damaged (for example, the cord is exposed or broken), or the plug loosens, stop using it at once. Continued use may lead to electric shocks, short circuits, or fire.
3. Do not touch the device or the power adapter with wet hands. Doing so may lead to short circuits, malfunctions, or electric shocks.

Child's Safety

1. Comply with all precautions with regard to child's safety. Letting children play with the device or its accessories may be dangerous.
2. The device and its accessories are not intended for use by children. Children should only use the device with adult supervision.

Operation Requirements

1. Use the device under allowed humidity and temperature conditions.
2. Do not aim the device at strong light sources (such as lamplight, and sunlight) when focusing it, to avoid reducing the lifespan of the CMOS sensor, and causing overbrightness and flickering.
3. Observe local laws and regulations, and respect the privacy and legal rights of others.

Industry Canada (ISED) Compliance Statement

This device complies with Industry Canada's licence-exempt RSS(s). Operation is subject to the following two conditions:
(1) This device may not cause interference; and
(2) This device must accept any interference, including interference that may cause undesired operation of the device.
Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence.L'exploitation est autorisée aux deux conditions suivantes :
(1) l'appareil ne doit pas produire de brouillage;
(2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptibled'en compromettre le fonctionnement.

The device meets the exemption from the routine evaluation limits in section 2.5 of RSS 102 and compliance with RSS-102 RF exposure, users can obtain Canadian information on RF exposure and compliance.
Le dispositif rencontre l'exemption des limites courantes d'évaluation dans la section 2.5 de RSS 102 et la conformité à l'exposition de RSS-102 rf, utilisateurs peut obtenir l'information canadienne sur l'exposition et la conformité de rf.

This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter. This equipment should be installed and operated with a minimum distance of 20 centimeters between the radiator and your body.
Cet émetteur ne doit pas être Co-placé ou ne fonctionnant en même temps qu'aucune autre antenne ou émetteur. Cet équipement devrait être ins tallé et actionné avec une distance minimum de 20 centimètres entre le radiateur et votre corps.

FCC Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

RF EXPOSURE WARNING

FCC Radiation Exposure Statement: This device complies with FCC radiation exposure limits set forth for an uncontrolled environment and it also complies with Part 15 of the FCC RF Rules. This equipment must be installed and operated in accordance with provided instructions and the antenna(s) used for this transmitter must be installed to provide a separation distance of at least 20 cm from all persons and must not be co-located or operating in conjunction with any other antenna or transmitter. End-users and installers must be provide with antenna installation instructions and consider removing the no-collocation statement.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Caution!

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Battery Safety

1.Your device contains a rechargeable lithium-ion battery and should be replaced only by a qualified service provider. Do not disassemble, open, crush, bend, deform, puncture, shred or attempt toaccess the battery in your device

2.Do not modify or remanufacture the battery, attempt to insert foreign objects into the battery, or immerse or expose it to water or other liquids, expose to fire, explosion or other hazard.

3.Do not use a battery if its case appears damaged, swollen, or compromised. Examples include, but are not limited to, leaking, odors, dents, corrosion, rust, cracks, swelling,melting, and scratches.

4..Do not put the battery in trash that is disposed of in landfills. When disposing of the battery, complywith local ordinances or regulations.

© 2025. All rights reserved. All trade names are registered trademarks of respective companies Apple, the Apple logo, iPhone are trademarks of Apple Inc. registered in the U.S. and other countries. Google, the Google logo, Android are trademarks of Google Inc. App Store is a service mark of Apple Inc. Google Play is a service mark of Google Inc.

V1.3 202507

THANK YOU FOR BUYING MEARI PRODUCT!

